

UTC TIP42C

PNP EPITAXIAL PLANAR TRANSISTOR


PNP EPITAXIAL PLANAR TRANSISTOR

DESCRIPTION

The UTC TIP42C is a PNP epitaxial planar transistor, designed for using in general purpose amplifier and switching applications.

FEATURE

*Complement to tip41C

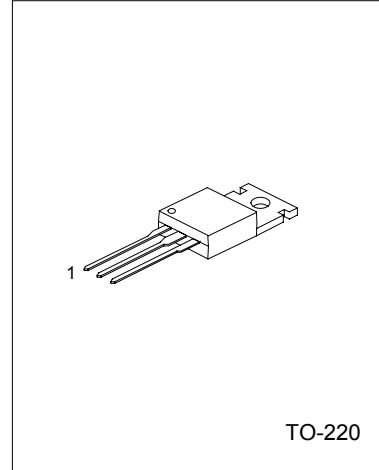

1:BASE 2:COLLECTOR 3:EMITTER

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNIT
Collector Base Voltage	V_{CBO}	-100	V
Collector to Emitter Voltage	V_{CEO}	-100	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current(DC)	I_C	-6	A
Collector Current(Pulse)	I_C	-10	A
Base Current	I_B	-2	A
Collector Dissipation($T_c=25^{\circ}\text{C}$)	P_C	65	W
Collector Dissipation($T_a=25^{\circ}\text{C}$)	P_C	2	W
Junction Temperature	T_j	150	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-65 ~ +150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS($T_c=25^{\circ}\text{C}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector Emitter Sustaining voltage(*)	BV_{CEO}	$I_C=-30\text{mA}, I_B=0$	-100			V
Collector cutoff Current	I_{CEO}	$V_{CE}=-60\text{V}, I_B=0$			-0.7	mA
Collector Cutoff Current	I_{CES}	$V_{CE}=-100\text{V}, V_{EB}=0$			-400	μA
Emitter Cutoff current	I_{EBO}	$V_{BE}=-5\text{V}, I_C=0$			-1	mA
Collector-Emitter Saturation Voltage(*)	$V_{CE(sat)}$	$I_C=-6\text{A}, I_B=-600\text{mA}$			-1.5	V
Base-Emitter On Voltage(*)	$V_{BE(on)}$	$I_C=-6\text{A}, V_{CE}=-4\text{V}$			-2.0	V
DC Current Gain(*)	h_{FE}	$I_C=-300\text{mA}, V_{CE}=-4\text{V}$ $I_C=-3\text{A}, V_{CE}=-4\text{V}$	30 15		75	
Current gain Bandwidth Product	f_T	$V_{CE}=-10\text{V}, I_C=-500\text{mA}, f=1\text{MHz}$	3			MHz





*Pulse Test: $PW \leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$

UTC

UNISONIC TECHNOLOGIES CO. LTD

1

QW-R203-007,A

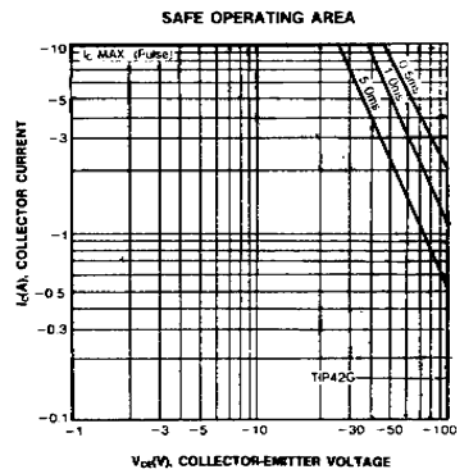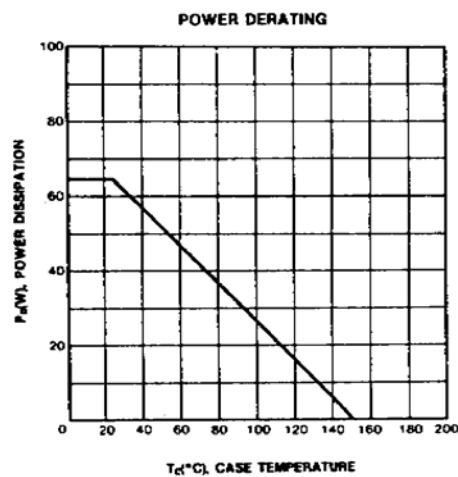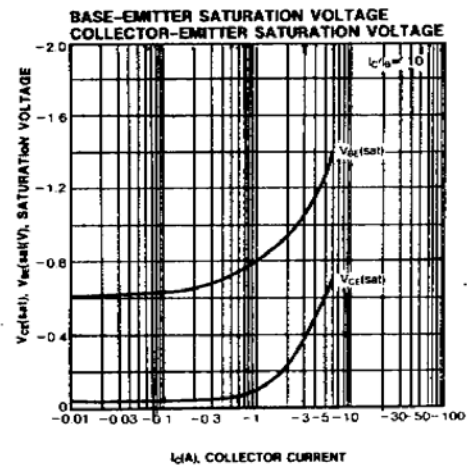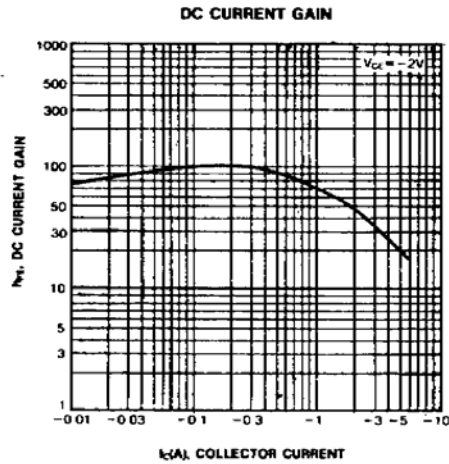

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.