

TO-92 Plastic-Encapsulate Transistors


TRANSISTOR(NPN)

Features

- High Total Power Dissipation.($P_C=0.45W$)
- High h_{FE} and Good Linearity
- Complementary to S9015

Limiting Values (Absolute Maximum Rating)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	50	V
V_{CEO}	Collector-Emitter Voltage	45	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current	100	mA
P_C	Collector Power Dissipation	450	mW
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	416	$^{\circ}C/W$
T_j	Junction Temperature	150	$^{\circ}C$
T_{stg}	Storage Temperature	-55~+150	$^{\circ}C$

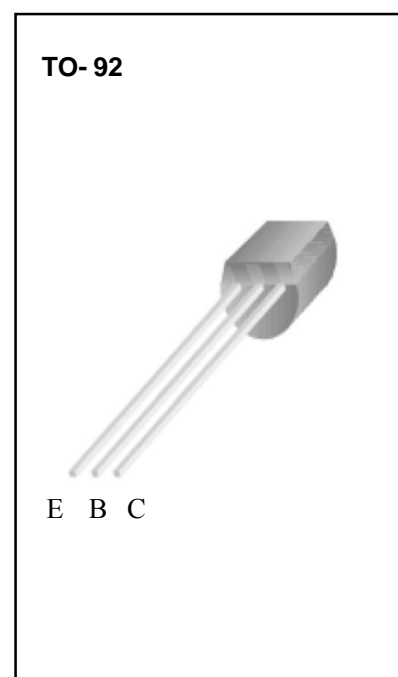









Electrical Characteristics (T=25 $^{\circ}C$ Unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu A, I_E=0$	50			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=1mA, I_B=0$	45			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu A, I_C=0$	5			V
Collector cut-off current	I_{CBO}	$V_{CB}=50V, I_E=0$			0.1	μA
Collector cut-off current	I_{CEO}	$V_{CE}=35V, I_B=0$			1	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=5V, I_C=0$			0.1	μA
DC current gain	h_{FE}	$V_{CE}=5V, I_C=1mA$	60		1000	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=100mA, I_B=5mA$			0.3	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=100mA, I_B=5mA$			1	V
Transition frequency	f_T	$V_{CE}=5V, I_C=10mA$ $f=30MHz$	150			MHz


CLASSIFICATION OF h_{FE}

Rank	A	B	C	D
Range	60-150	100-300	200-600	400-1000

Typical Characteristics

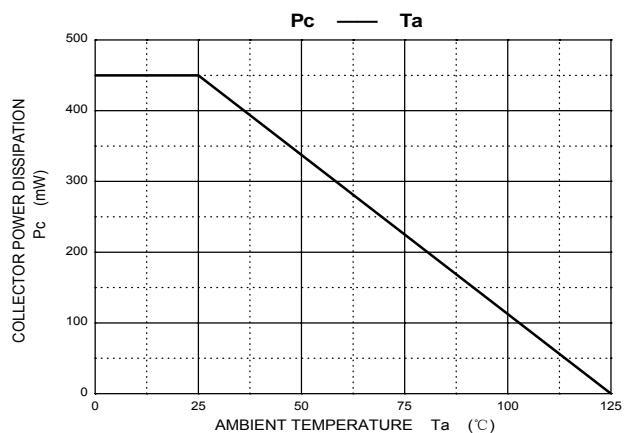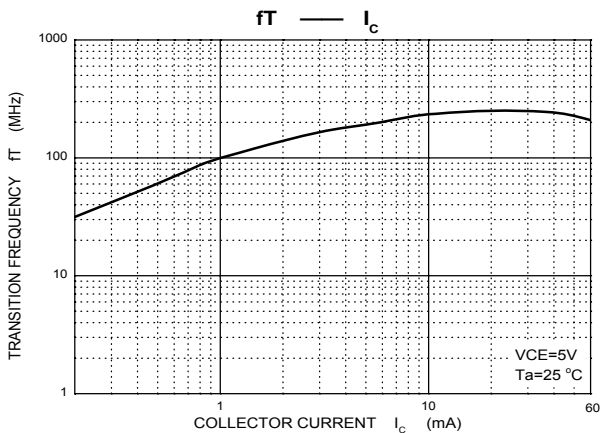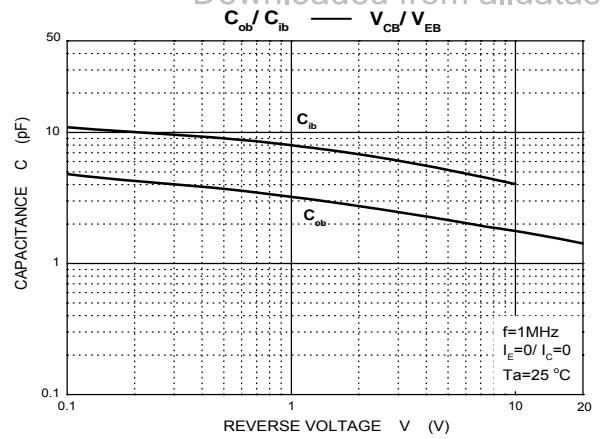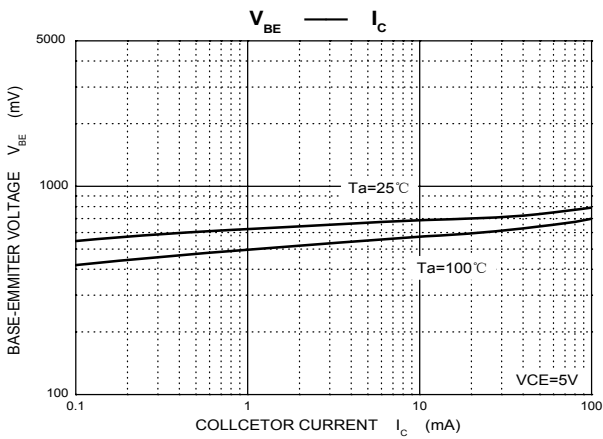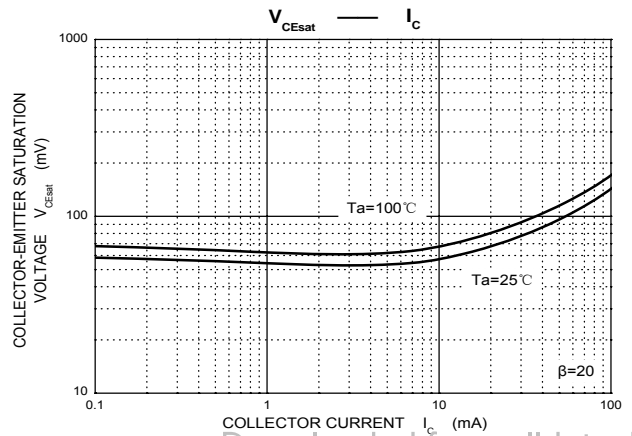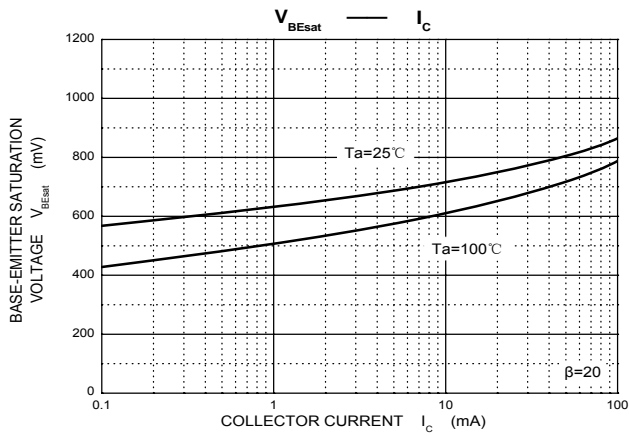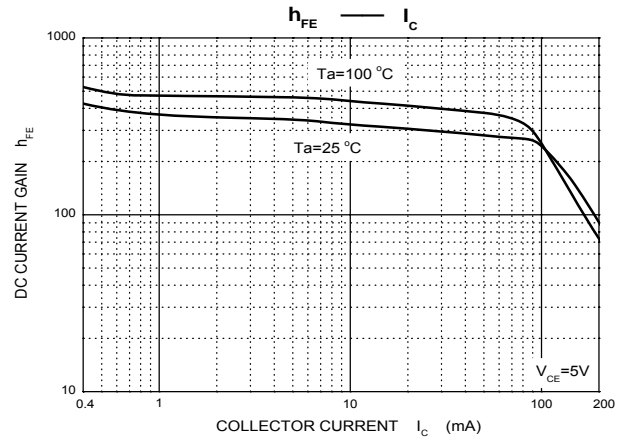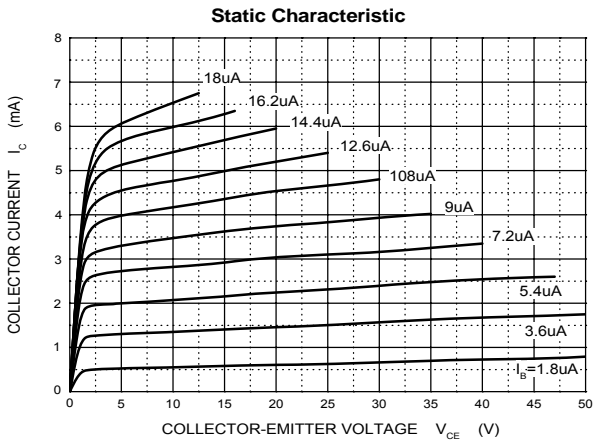

TO-92 Package Outline Dimensions

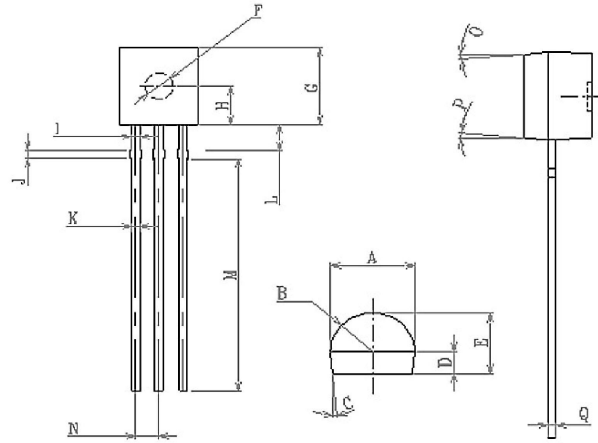


SYMBOL	MIN	MAX	SYMBOL	MIN	MAX
A	4.1	4.3	K	0.36	0.56
B	R2.0	R2.2	L	1.35	1.45
C	4.1		M	12.00	12.5
D	1.1	1.2	N	1.24	1.3
E	3.13	3.33	O	5°	
F	Φ1.48	Φ1.52	P	5°	
G	4.4	4.6	Q	0.37	0.39
H	2.2	2.3			
I	0.36	0.56			
J	0.5	0.6			

单位: mm

Downloaded from alldatasheet.com

TO-92 Suggested Pad Layout

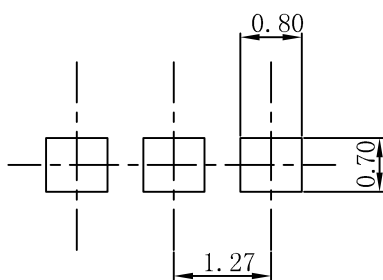


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.05 mm.
3. The pad layout is for reference purposes only.


NOTICE

JSHD reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSHD does not assume any liability arising out of the application or use of any product described herein.

TO-92 Tape and Reel

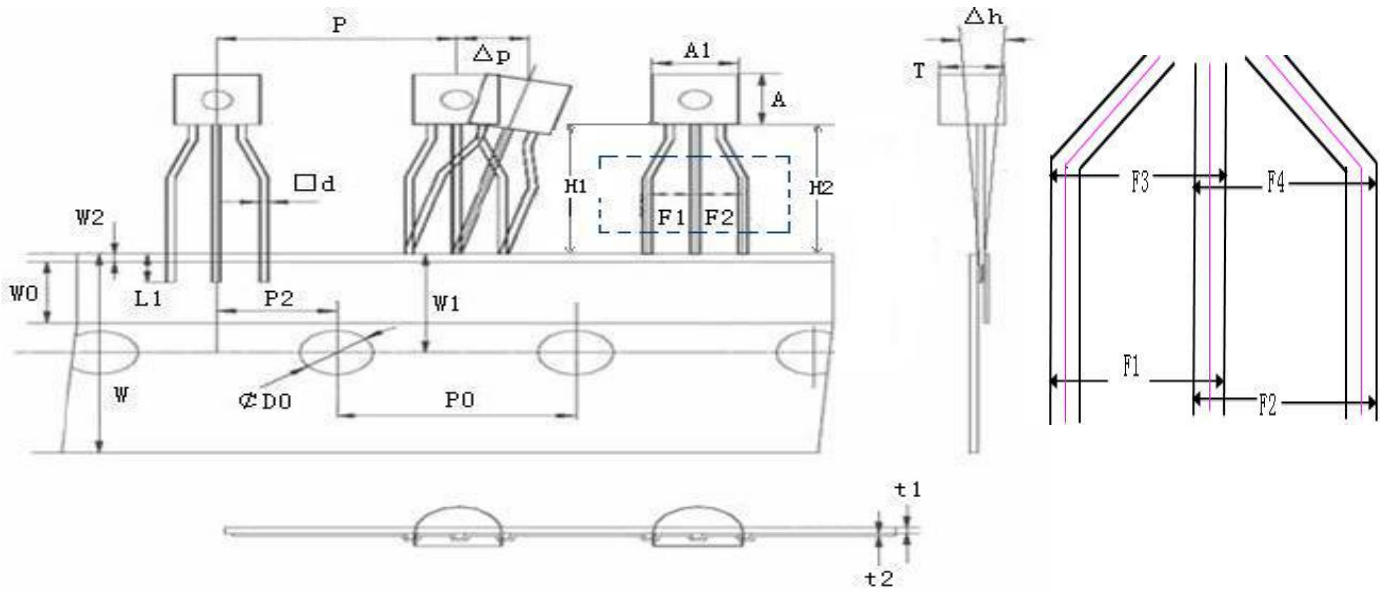

Symbol	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A1	4.1	4.2	4.3	0.171	0.176	0.180
A	4.4	4.5	4.6	0.184	0.188	0.192
T	3.13	3.23	3.33	0.131	0.134	0.139
□d	0.36	0.45	0.56	0.015	0.018	0.022
L1	2.5	—	—	0.098	—	—
P	12.4	—	13	0.488	—	0.512
P0	12.5	12.7	12.9	0.492	0.5	0.508
P2	6.05	6.35	6.65	0.238	0.25	0.262
F1,F2	2.75	3.00	3.25			
F3,F4	2.75	3.00	3.25			
F1-F2	—	—	0.4			

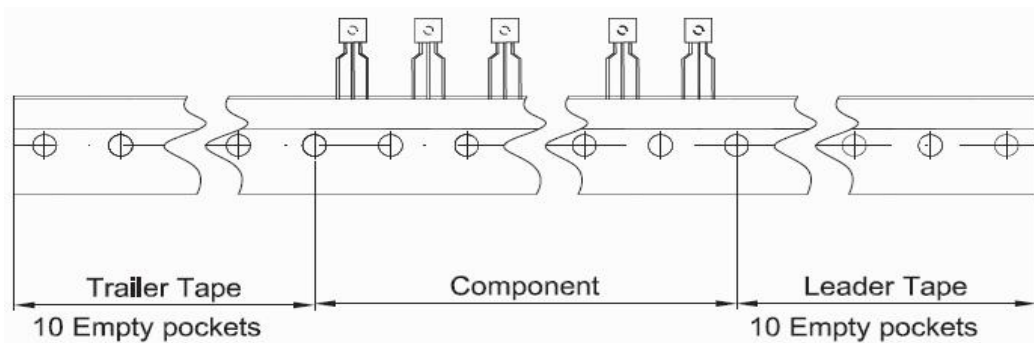

Package	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92	2000PCS	343×158×42	20000PCS	470×358×180